



Introducing a totally new concept in smoke detector testing!



smokesabre™ is the solution to problems previously associated with aerosol smoke detector testers.

smokesabre™ delivers...

- More tests per can
- Faster detector activation and clearing
- Lowest cost per test
- The end of harmful residue - risk is designed out with the sabre
- Silicone free testing
- Eco-responsibility - 100% bio-degradable sabre, ozone friendly, no CFCs and low GWP
- Detector manufacturer endorsement
- UL and ULC Listing
- 2.6oz can

Flick'n Test
More than just canned smoke!

SIGNALING



Fire Alarm Equipment
77TL
Aerosol Smoke
Detector Tester



Automatic
Fire Detector
Accessory
77TL

Risk assessment required when used on energized equipment.

smokesabre™ conforms to the following codes:

"...the detectors shall be tested in place to ensure smoke entry into the sensing chamber and an alarm response"
NFPA 72 Chapter 14 (14.4.2.2 (g))

"Each detector shall be tested for operation by introducing smoke or simulated smoke into the detecting chamber."

"Le fonctionnement de chaque détecteur de fumée doit être vérifié par l'introduction de fumée ou de fumée simulée dans la chambre de détection, conformément aux instructions du fabricant."

CAN/ULC-S536-04, 5.7.4.1.2

NEW



How does it work?

smokesabre™ is a major step forward in the design of smoke detector testers. All other pressurized aerosol smoke alarm testers have the inherent drawback that, if misused, they leave harmful residue on the casing and / or inside the chamber of the detector. This residue can discolor the detector plastic, can attract dust, affect sensitivity and, in some cases, lead to corrosion, cracking or even complete failure of the detector. Residue occurs when testing aerosols are used too close to the detector, or smoke alarm, despite instructions not to do so.

smokesabre™ cannot be used too close to the detector and eliminates harmful residue while focussing and targeting the canned smoke test gas.



When **smokesabre™** is in the closed position the sabre prevents access to the spray button. The aerosol can only be activated when the sabre is fully extended. In use, air is drawn through the holes in the sabre and this, coupled with the venturi effect involved, assists the velocity and vaporization process of the airborne 'smoke' particles. The result is a more effective test, delivering better detector activation, using less gas per test, and reducing costs while eliminating harmful residue.

Other products may be recommended as best used with accessory devices to prevent spraying too close. With **smokesabre™** there is no choice. The sabre is part of the product and cannot be used without it!

smokesabre™ is a universal test product covering the sensitivity range of all smoke detectors (see particle size comparison chart).

The extending sabre is made of 100% bio-degradable plastic making **smokesabre™** the only smoke detector test aerosol to be both recyclable and eco-friendly.

smokesabre™ is UL and ULC listed, meets global testing standards, and is approved by major smoke detector manufacturers.

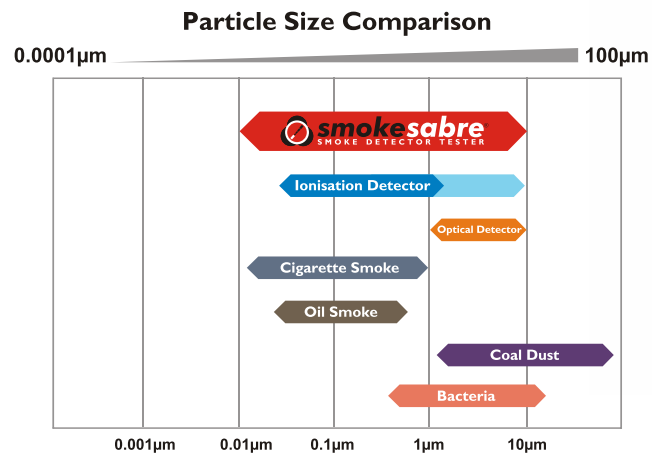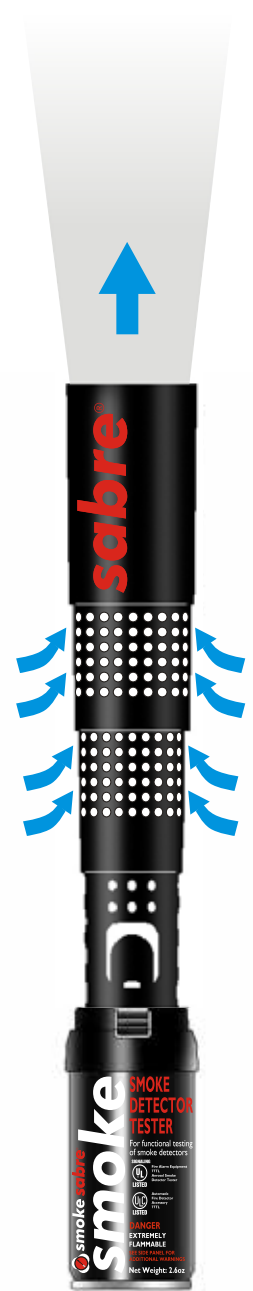

Risk assessment required when used on energized equipment.

As our policy is one of continuous improvement, details of products described within this publication are subject to change without notice. All information provided here is believed to be correct at the time of going to press. Every effort has been made to ensure the accuracy of information which is provided in good faith but nothing contained herein is intended to incorporate any representation or warranty, either express or implied or to form the basis of any legal relations between the parties hereto, additional to or in lieu of such as may be applicable to a contract of sale or purchase.